





Ubuntu12.04 下的 C 编程—Emacs 的使用

安装完 Ubuntu12.04 后，进入系统，首先看到的界面即为下图：

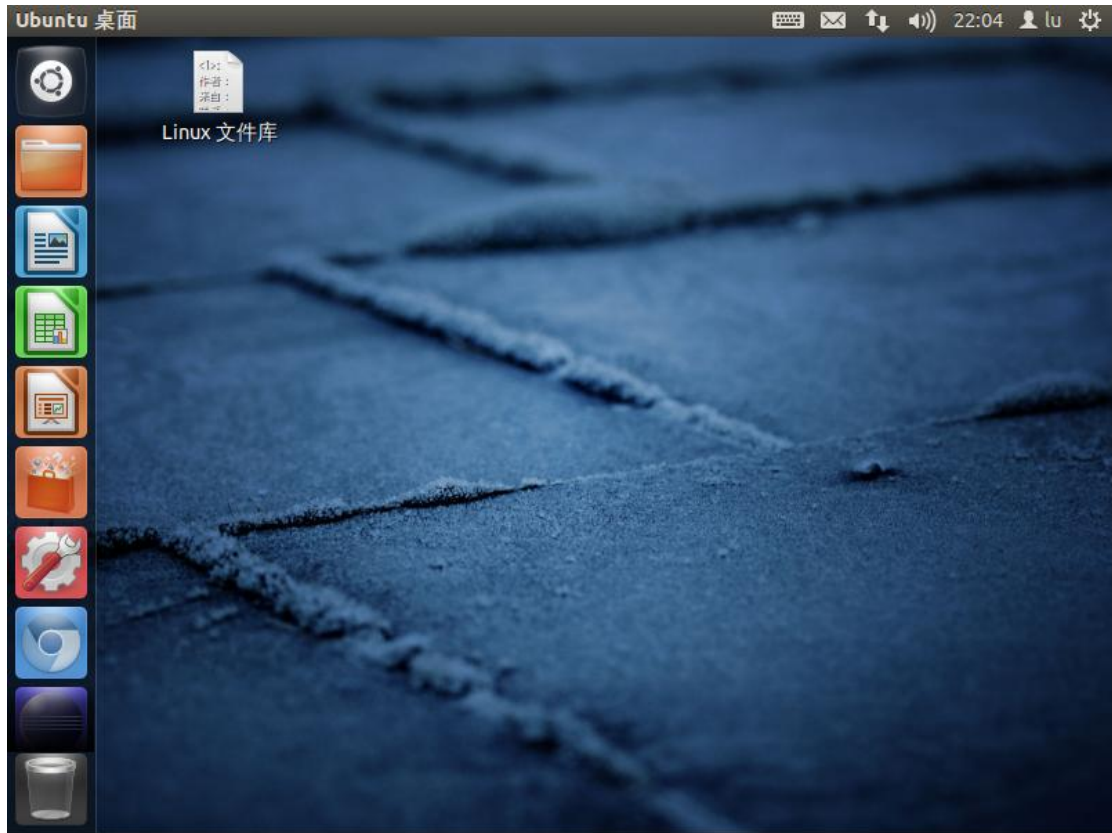


打开终端，输入 ‘emacs’，敲击回车键，如下：

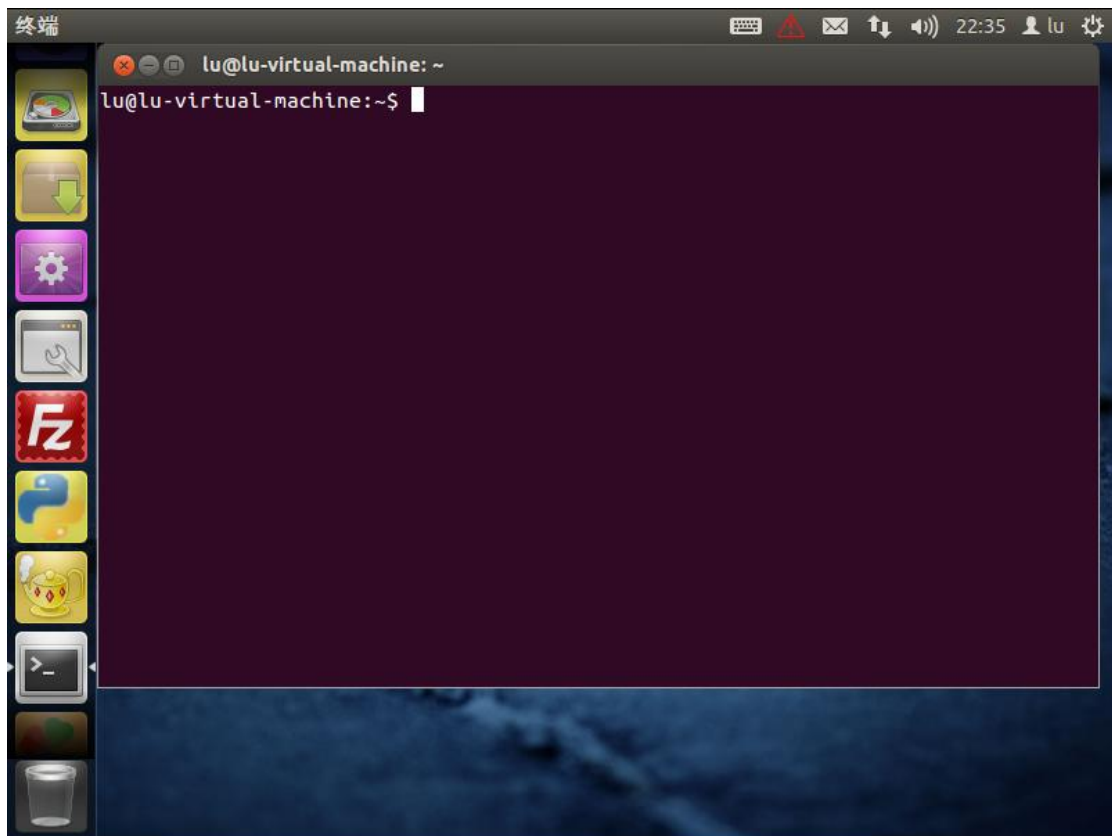


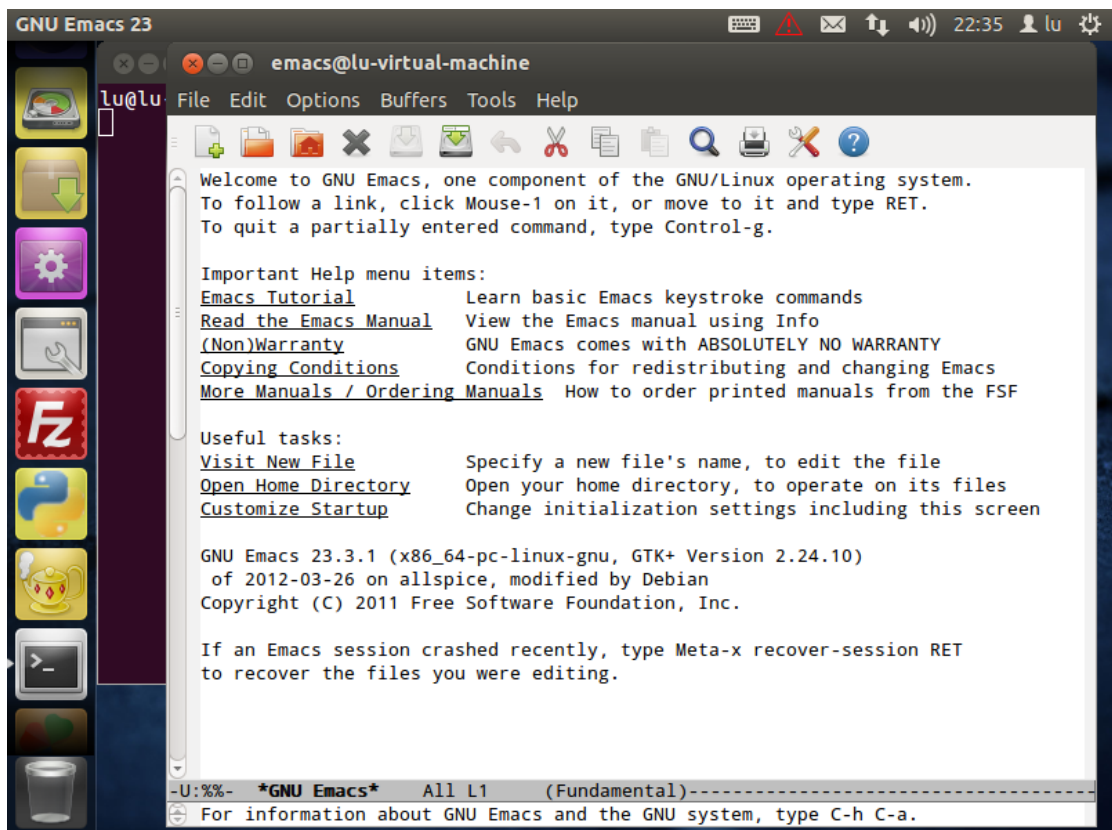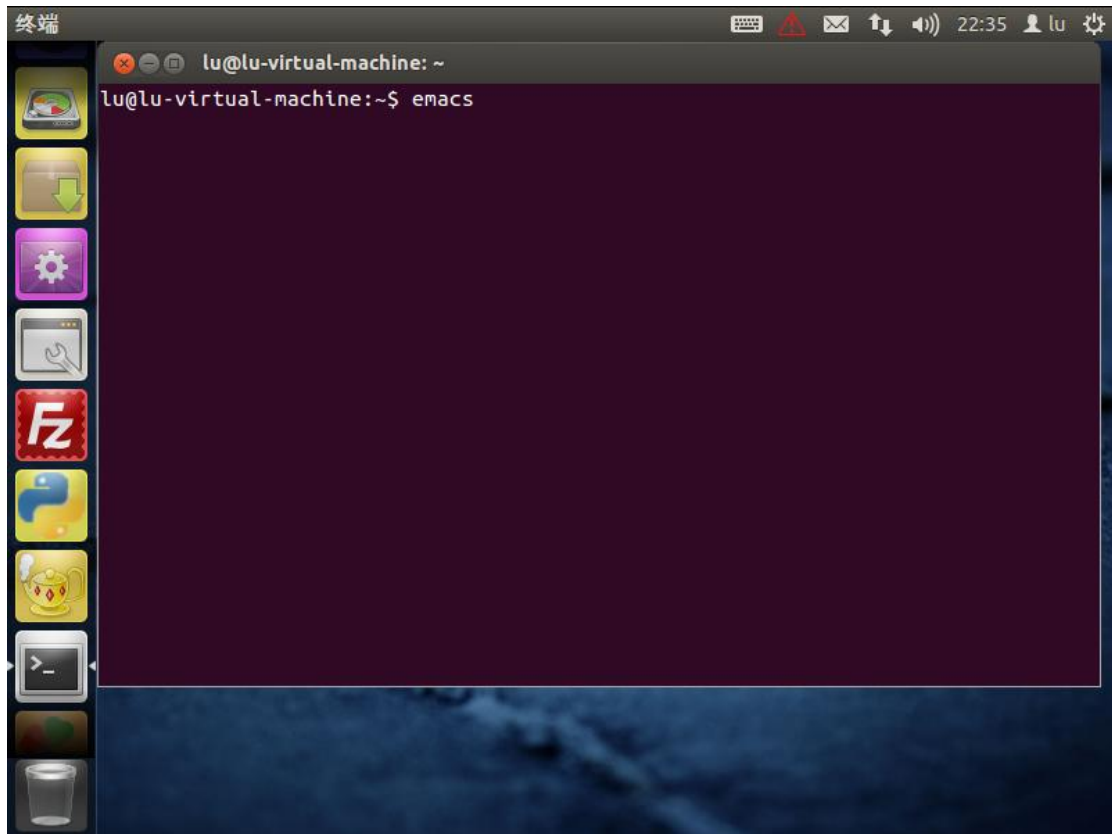


单击窗口左上角的  图标，则会打开创建文件的窗口，如下：

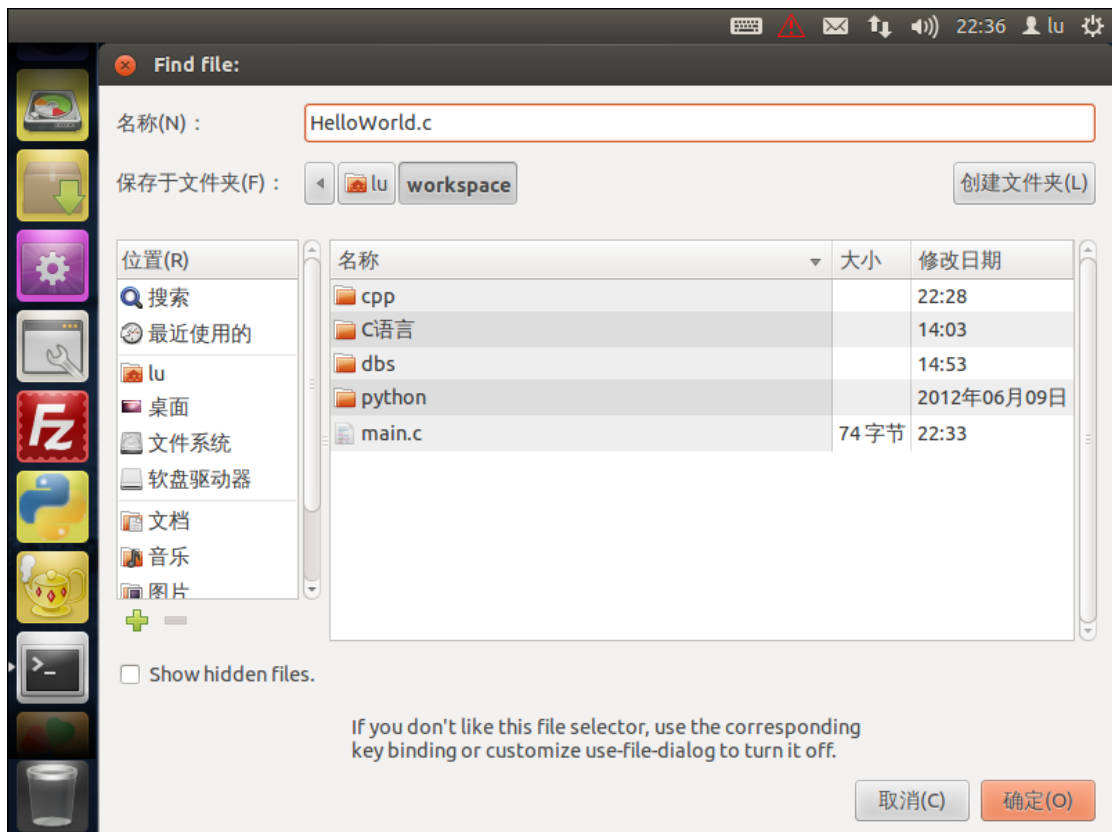

选择存储的路径，单击‘确定’按钮，在窗口中输入文件代码（如：HelloWorld.c），如下：

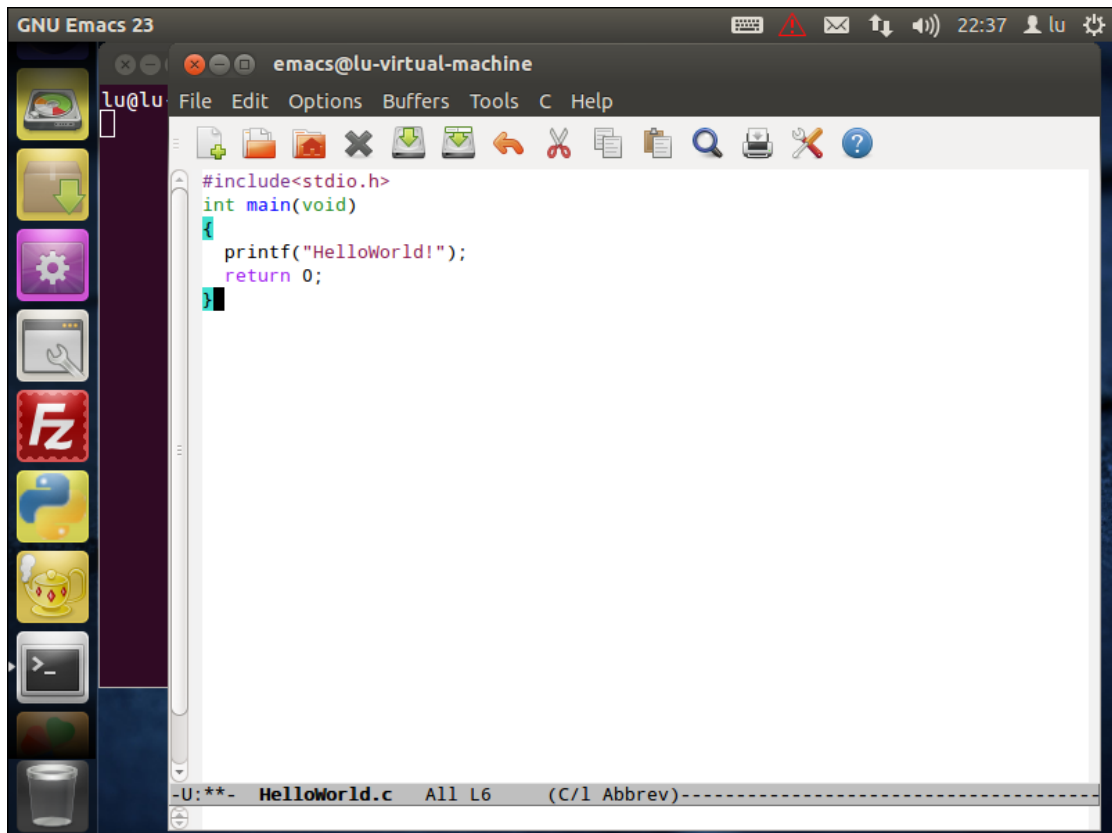


选择 Tools，单击选项中的 ‘Complile’，如下：

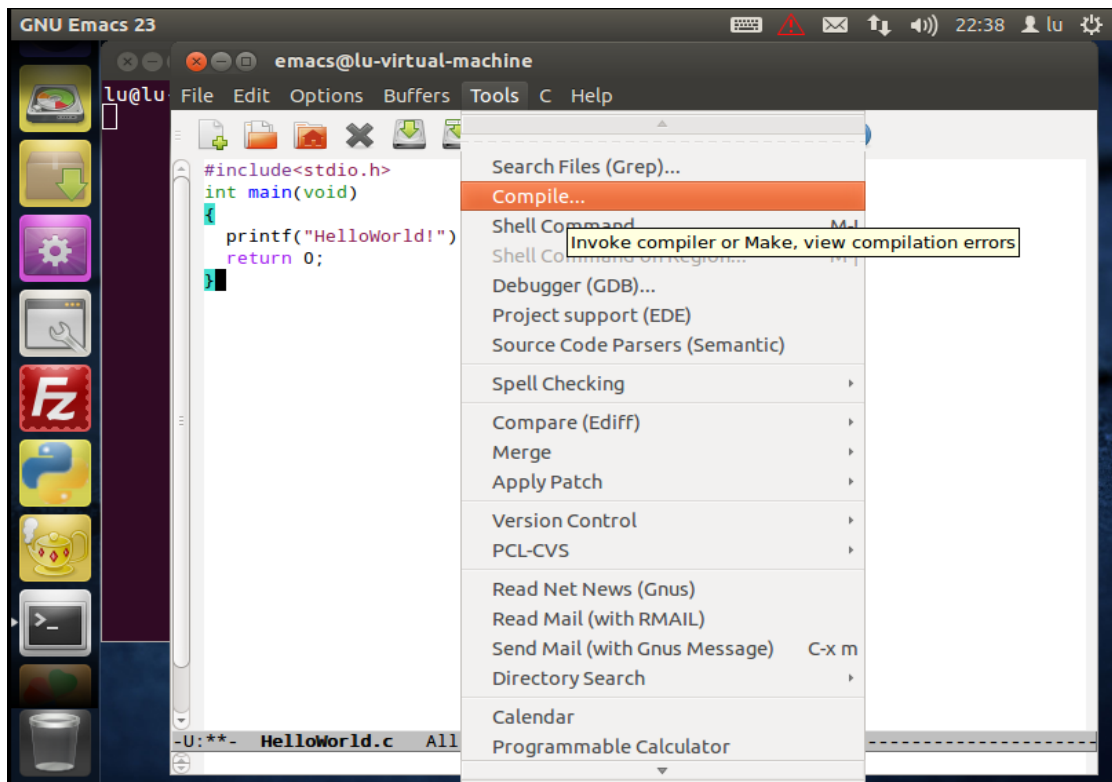


在窗口底端输入：'Compile Command: gcc-o 文件名 文件名.C(如： gcc-o HelloWorld HelloWorld.c)'，并单击回车键。


※注意：可能由于版本的不同或者计算机系统问题，' gcc -o' 间有时需要空格，有时不需要，如果无法调试，可换另一种试试。

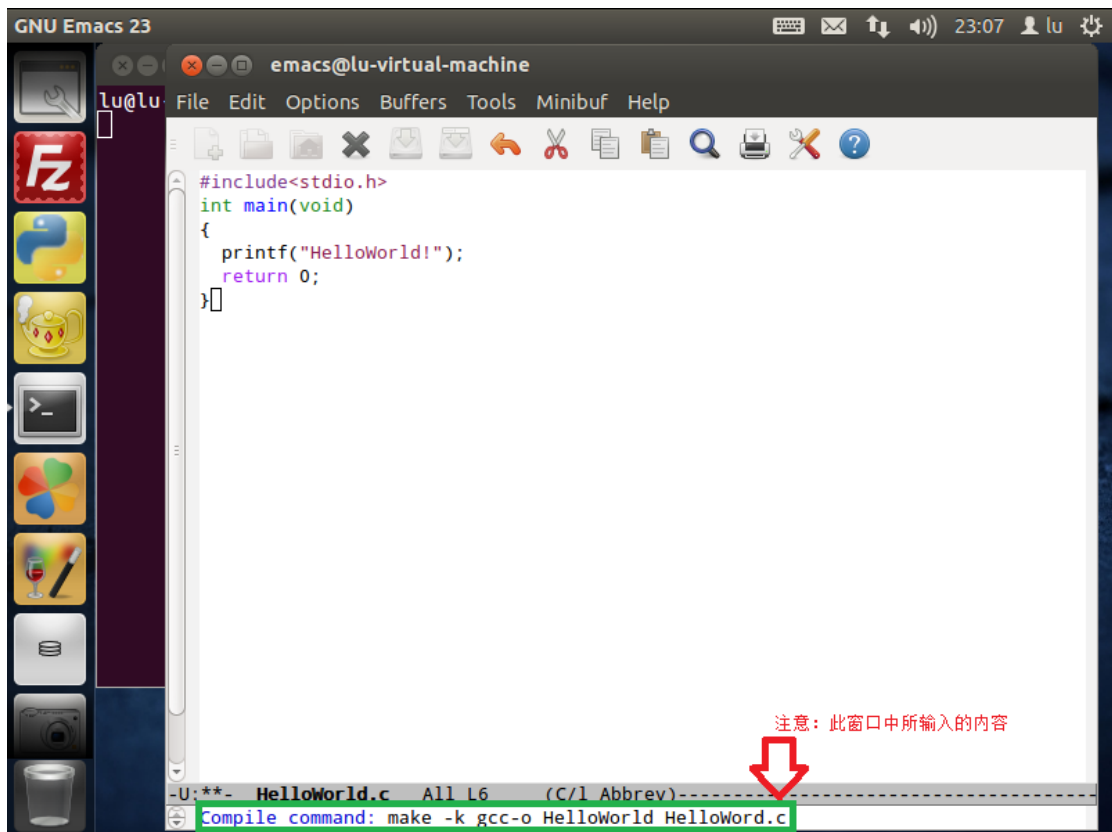


输入'y':

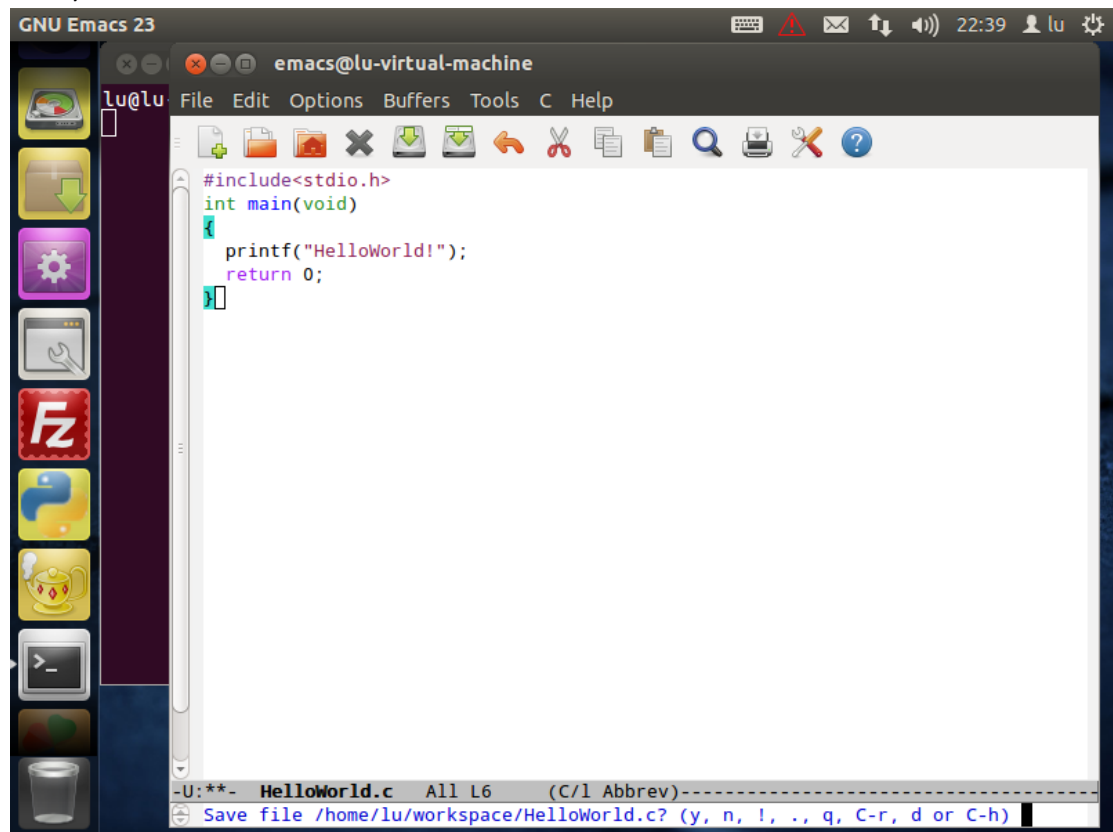

然后，在所在的窗口中，选择‘Tools’，单击‘Shell Command’如下：

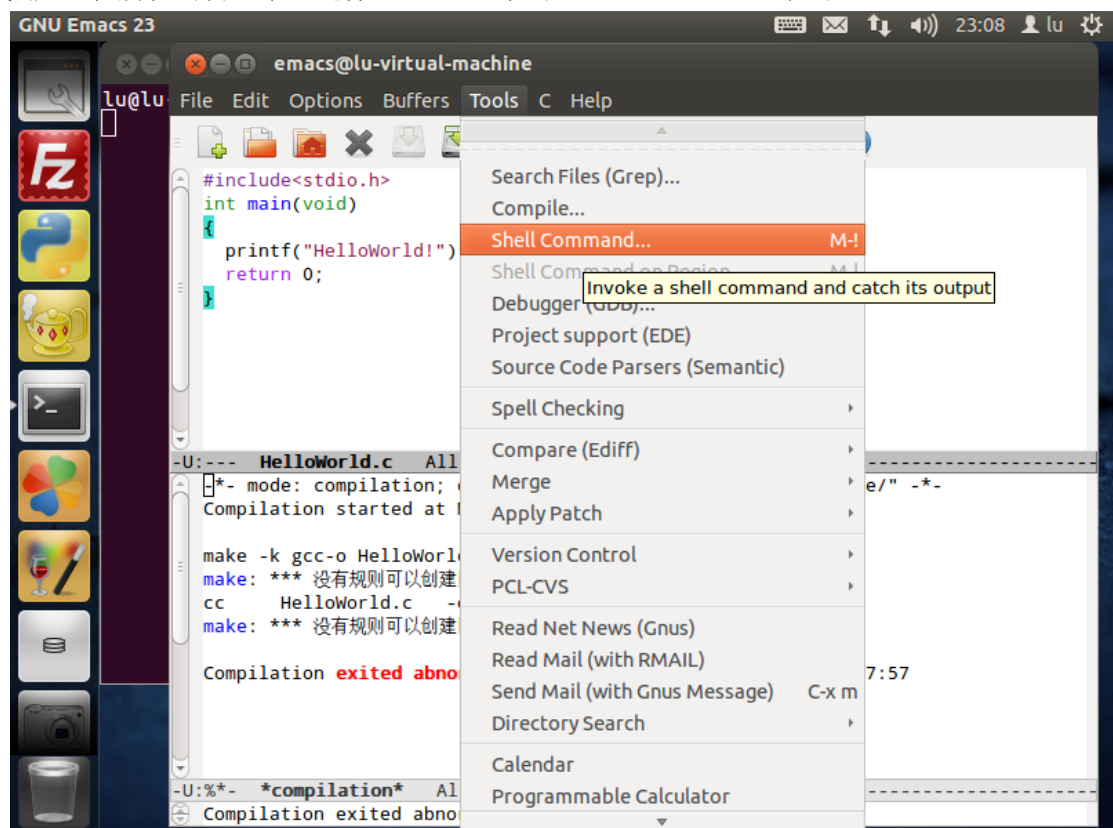

在选择后的窗口下方，‘Shell Command: ./文件名’（如：./HelloWorld），并单击回车键，如下：

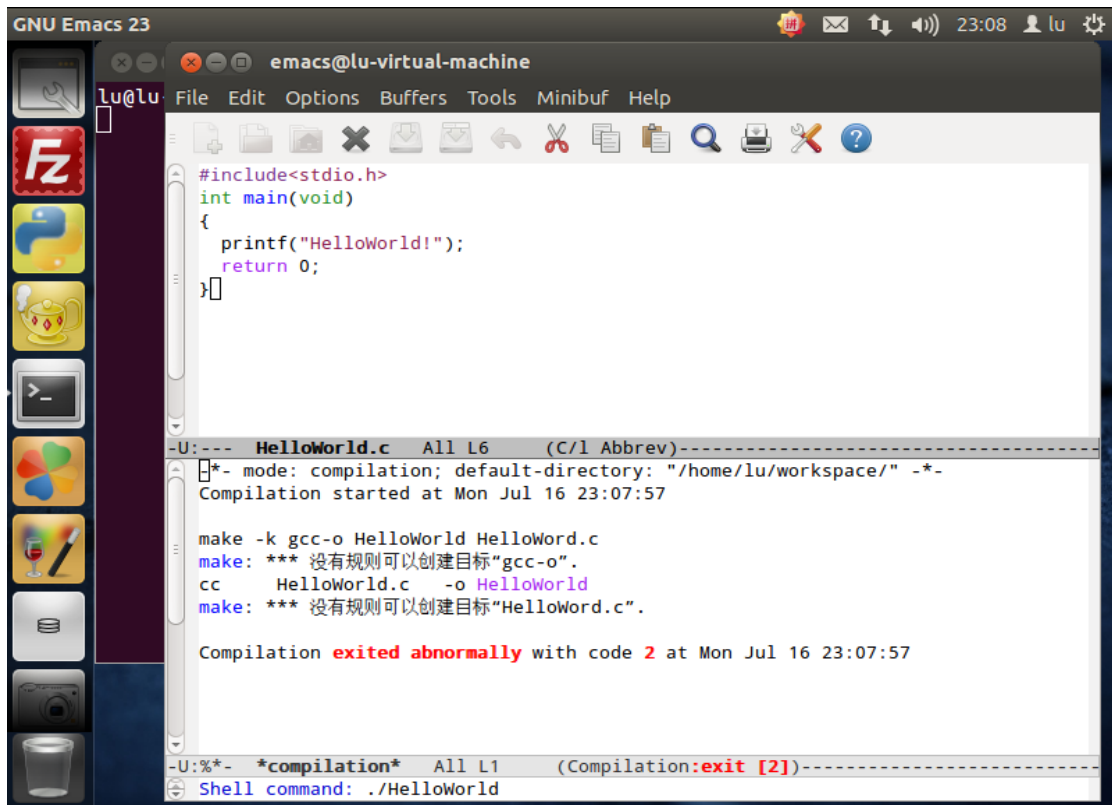


The screenshot shows the GNU Emacs 23 interface. The top menu bar includes File, Edit, Options, Buffers, Tools, Minibuf, and Help. The left sidebar contains various icons for file operations and system utilities. The main window displays a C program named `HelloWorld.c` with the following code:

```
#include<stdio.h>
int main(void)
{
    printf("HelloWorld!");
    return 0;
}
```

Below the code, the compilation output is shown in a buffer named `Compilation:exit [2]`. The output indicates that the compilation failed with an error code of 2. The error messages are:

```
make -k gcc-o HelloWorld HelloWorld.c
make: *** 没有规则可以创建目标"gcc-o".
cc HelloWorld.c -o HelloWorld
make: *** 没有规则可以创建目标"HelloWord.c".

Compilation exited abnormally with code 2 at Mon Jul 16 23:07:57
```

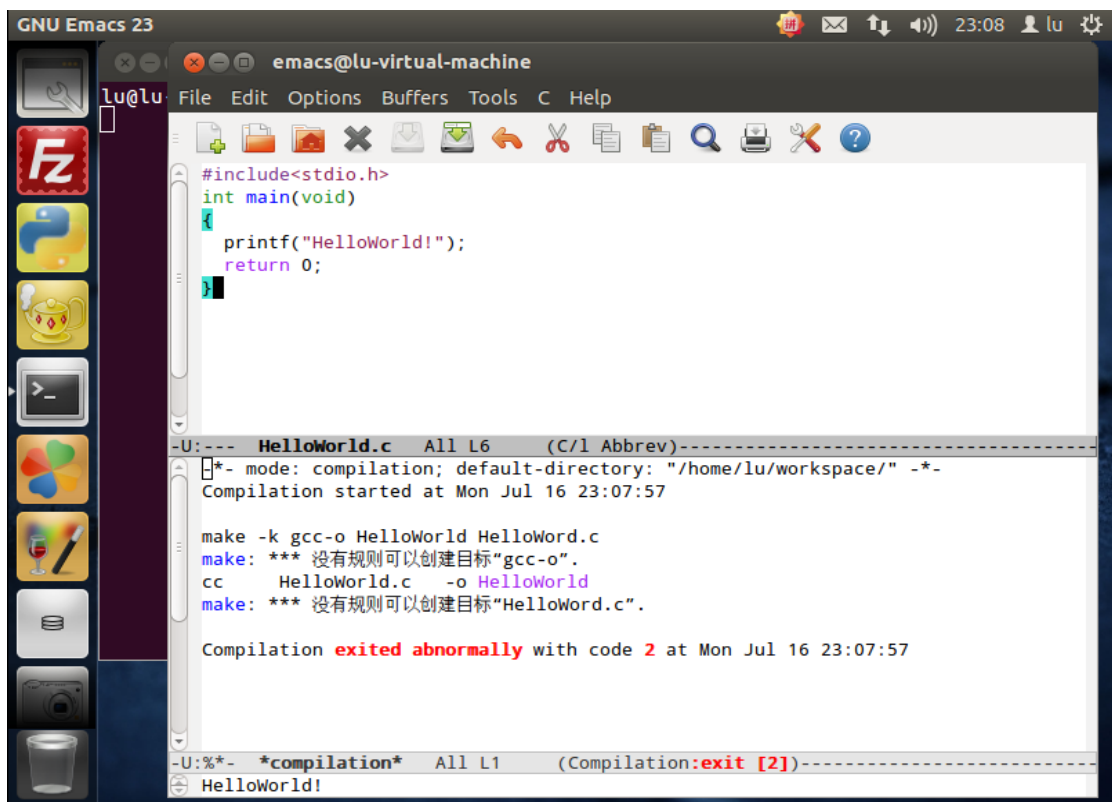

This screenshot shows the same GNU Emacs 23 interface as the first one, but the output buffer is scrolled down to show the final result of the compilation. The output is:

```
Compilation exited abnormally with code 2 at Mon Jul 16 23:07:57

HelloWorld!
```

下一篇: 《七, Ubuntu12.04 下的 C 编程—Geany 的使用》

谨以此文章感谢那些为 Linux 的发展奋斗的人……